


DIN 3117 ISO 6787

- Раскрытие подвижных губок с правым вращением штифта
- Головка под углом 22,5 градусов со шкалой в мм и дюймах

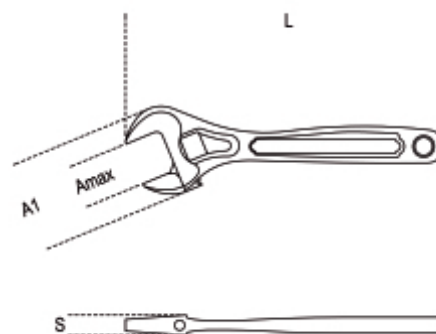

| art. | L mm | L " | A max mm | A1 mm | S mm | g |
|-----------|---------|--------|-------------|----------|---------|------|
| 001110010 | 100 | 4 | 15 | 33,0 | 9,5 | 60 |
| 001110015 | 150 | 6 | 24 | 49,0 | 11,9 | 165 |
| 001110020 | 200 | 8 | 28 | 62,0 | 14,0 | 325 |
| 001110025 | 250 | 10 | 34 | 70,0 | 16,0 | 505 |
| 001110030 | 300 | 12 | 35 | 84,0 | 18,0 | 790 |
| 001110038 | 380 | 15 | 45 | 97,0 | 20,0 | 1320 |
| 001110045 | 450 | 18 | 54 | 115,0 | 22,5 | 2043 |
| 001110060 | 600 | 24 | 62 | 136,0 | 28,0 | 3300 |