


410A
сверло со ступенчатым цилиндрическим хвостовиком по металлу, HSS

R ≤ 650 N/mm²
HV 750÷820

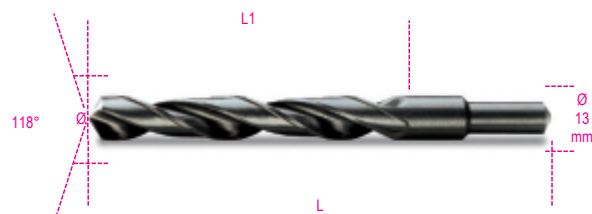

art.	Ø mm	L mm	L1 mm	g
004100281	13,50	160	108	107
004100283	14,00	160	108	109
004100285	14,50	169	114	131
004100287	15,00	169	114	140
004100289	15,50	178	120	150
004100291	16,00	178	120	152
004100292	16,50	186	125	177
004100293	17,00	186	125	176
004100294	17,50	194	130	195
004100295	18,00	194	130	193
004100296	18,50	202	135	233
004100297	19,00	202	135	224
004100298	19,50	210	140	269
004100299	20,00	210	140	247